




MSD MANUFACTURING CO.,LTD.

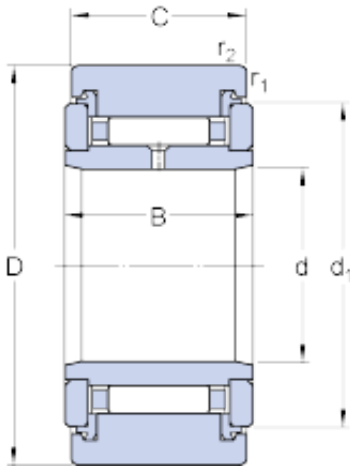

25 mm x 52 mm x 25 mm skf NATR 25 PPXA
Support rollers with flange rings with an inner ring

Bearing No. NATR 25 PPXA

NATR 25 PPXA Bearing 2D drawings and 3D CAD models

Size	25x52x24 mm
Bore Diameter	25 mm
Outer Diameter	52 mm
Width	24 mm
D	52 mm
d	25 mm
C	24 mm
B	25 mm
d ₁	41.5 mm
r _{1,2} - min.	1 mm
Basic dynamic load rating - C	14.7 kN
Basic static load rating - C ₀	25.5 kN
Fatigue load limit - P _u	3.1 kN
Maximum static radial loads - F _r	21.6 kN
Maximum static radial loads - F _{0r}	31 kN
Limiting speed	2400 r/min
Category	Cam Follower and Track Roller - Yoke Type
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.28
EAN	7316571592657



MSD MANUFACTURING CO.,LTD.

Product Group	B04144
Roller Surface Profile	Flat
Profile	Yoke Type
Enclosure	Sealed
Rolling Element	Needle Bearing
Relubricatable	Yes
Inch - Metric	Metric
Other Features	Caged With Flanged Inner Ring 3 Stage Sealing
Long Description	25MM Bore; 52MM Roller Diameter; 24MM Roller Width; Flat Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
Category	Cam Followers Yoke Type
UNSPSC	31171530
Harmonized Tariff Code	8482.40.00.00
Noun	Bearing
Keyword String	Cam Follower
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	NATR 25 PPXA
Weight / LBS	0.617
Roller Width	0.945 Inch 24 Millimeter
Roller Diameter	2.047 Inch 52 Millimeter
Bore	0.984 Inch 25 Millimeter
d_1	41.5 mm
$r_{1,2}$ min.	1 mm
Basic dynamic load rating C	14.7 kN
Basic static load rating C_0	25.5 kN
Fatigue load limit P_u	3.1 kN
Maximum dynamic radial loads F_r max.	21.6 kN
Maximum static radial loads F_{0r} max.	31 kN



MSD MANUFACTURING CO.,LTD.

Mass support roller	0.27 kg
---------------------	---------