




MSD MANUFACTURING CO.,LTD.

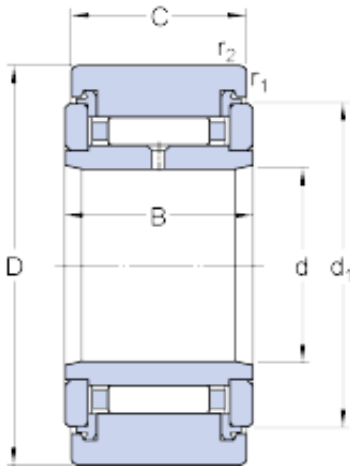

40 mm x 80 mm x 32 mm skf NATR 40 PPXA
Support rollers with flange rings with an inner ring

Bearing No. NATR 40 PPXA

NATR 40 PPXA Bearing 2D drawings and 3D CAD models

Size	40x80x30 mm
Bore Diameter	40 mm
Outer Diameter	80 mm
Width	30 mm
D	80 mm
d	40 mm
C	30 mm
B	32 mm
d ₁	66 mm
r _{1,2} - min.	1.1 mm
Basic dynamic load rating - C	31.9 kN
Basic static load rating - C ₀	57 kN
Fatigue load limit - P _u	7.1 kN
Maximum static radial loads - F _r	41.5 kN
Maximum static radial loads - F _{or}	58.5 kN
Limiting speed	1500 r/min
Category	Cam Follower and Track Roller - Yoke Type
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.81
EAN	7316571623719



MSD MANUFACTURING CO.,LTD.

Product Group	B04144
Roller Surface Profile	Flat
Profile	Yoke Type
Enclosure	Sealed
Rolling Element	Needle Bearing
Relubricatable	Yes
Inch - Metric	Metric
Other Features	Caged With Flanged Inner Ring 3 Stage Sealing
Long Description	40MM Bore; 80MM Roller Diameter; 30MM Roller Width; Flat Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
Category	Cam Followers Yoke Type
UNSPSC	31171530
Harmonized Tariff Code	8482.40.00.00
Noun	Bearing
Keyword String	Cam Follower
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	NATR 40 PPXA
Weight / LBS	1.786
Roller Diameter	3.15 Inch 80 Millimeter
Roller Width	1.181 Inch 30 Millimeter
Bore	1.575 Inch 40 Millimeter
d_1	66 mm
$r_{1,2}$ min.	1.1 mm
Basic dynamic load rating C	31.9 kN
Basic static load rating C_0	57 kN
Fatigue load limit P_u	7.1 kN
Maximum dynamic radial loads F_r max.	41.5 kN
Maximum static radial loads F_{0r} max.	58.5 kN



MSD MANUFACTURING CO.,LTD.

Mass support roller	0.8 kg
---------------------	--------