




MSD MANUFACTURING CO.,LTD.

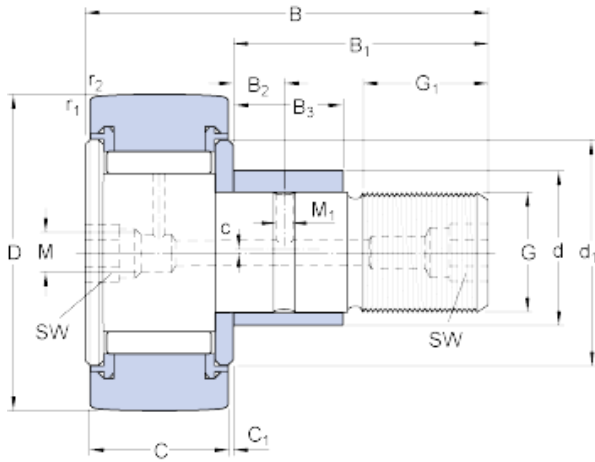

15 mm x 30 mm x 40 mm skf KRVE 30 PPA Track rollers,Cam followers

Bearing No. KRVE 30 PPA

KRVE 30 PPA Bearing 2D drawings and 3D CAD models

Size	15x30x40 mm
Bore Diameter	15 mm
Outer Diameter	30 mm
Width	40 mm
D	30 mm
d	15 mm
B	40 mm
C	14 mm
B ₁	25 mm
B ₂	6 mm
B ₃	11 mm
C ₁	0.6 mm
d ₁	23 mm
G	M 12x1.5
G ₁	13 mm
M	4 mm
M ₁	3 mm
SW	6 mm
c	0.5 mm
r _{1,2} - min.	0.6 mm
Basic dynamic load rating - C	9 kN
Basic static load rating - C ₀	14.6 kN
Fatigue load limit - P _u	1.7 kN



MSD MANUFACTURING CO.,LTD.

Maximum dynamic radial loads - F_r	11 kN
Maximum static radial loads - F_{0r}	15.6 kN
Limiting speed	3200 r/min
Mass support roller	0.096 kg
Recommended tightening torque	22 N · m
Grease fitting	NIP A1x4.5
Category	Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.111
Product Group	B04144
B_1	25 mm
B_2	6 mm
B_3	11 mm
C_1	0.6 mm
d_1	23 mm
G_1	13 mm
M_1	3 mm
$r_{1,2}$ min.	0.6 mm
Basic dynamic load rating C	8.97 kN
Basic static load rating C_0	14.6 kN
Fatigue load limit P_u	1.66 kN
Maximum dynamic radial loads F_r max.	11 kN
Maximum static radial loads F_{0r} max.	15.6 kN
Mass cam follower	0.096 kg
Hexagonal nut	M 12x1.5